



Simply Engineered Better

Project _____
 Item No. _____
 Quantity _____

601LTG

Undercounter Low Temperature
Glasswasher



STANDARD FEATURES

- Back saving, practical, 22-1/2" [572] loading height
- Soft Start, protects glasses and mugs from chipping and breaking
- Industry exclusive, deep drawn, type 316 stainless steel tank
- 12-1/8" [308] door opening, ideal for racked glasses
- "Vari-cycle" button allows unlimited number of user selectable cycle times
- Fill and drain type operation. Rinse water is always re-used as next cycle's wash water
- Delime feature allows easy deliming of wash cavity
- Auto-clean flushes tank interior at end of serving period
- Electric tank heater (0.75 kW)
- Microcomputer controls and digital temperature displays
- Flexible fill and drain lines
- Flow regulator/line strainer- no PRV required
- Standard pumped drain for total ease of installation
- Liquid detergent, sanitizer and rinse-aid dispensing pumps complete with prime switches
- Counter- balanced door
- Advanced service diagnostics
- Two 20"x20" racks, one peg, one flat

601LTG LOW-TEMP GLASSWASHER

SPECIFIER STATEMENT

Glasswasher will be Moyer Diebel model 601LTG low temperature undercounter glasswasher, complete with 1 Hp pump motor, soft start feature, all stainless steel frame and fill and drain type operation. Wash tank to be stainless steel type 316.
 1 year parts and labor warranty.

OPTIONS & ACCESSORIES


- | | |
|---|---------------|
| <input type="checkbox"/> 1" roller casters | P/N 0712480-1 |
| <input type="checkbox"/> Flat bottom dishrack | P/N 101273 |
| <input type="checkbox"/> Peg dishrack | P/N 101285 |
| <input type="checkbox"/> 17RS - 17" Stand | P/N 0708757 |
| <input type="checkbox"/> 4" stand converts to a standard counter height | |



Moyer Diebel Ltd. - Canada

2674 North Service Rd., Jordan Station, Ontario, Canada L0R 1S0 Tel: 800/263-5798 Fax: 905/562-5422
 sales@moyerdiebellimited.com
 www.championindustries.com/1canada

Dimensions shown in inches and [millimeters]

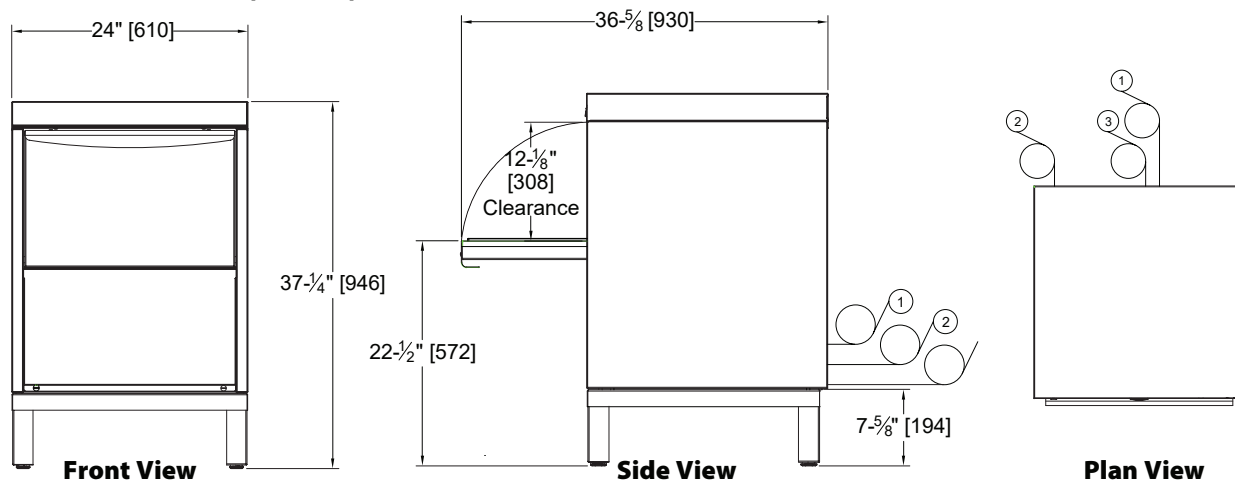

***Note:** Allow additional 3" clearance from wall.

Utilities

1 Electrical Connection

115/60/1; 12 amp draw; to be fused at 15 amp. 4ft. plug-in cord supplied.

2 Water Connection

140 °F Min., 1/2" supply hot water connection
6 ft. long, 1/2" I.D. flexible fill hose with 3/4" hose connector
Flow pressure: 25-95 psi

3 Drain Connection

6 ft. long, 5/8" I.D. flexible drain hose
Max. drain flow: 15 USG PM

SPECIFICATIONS

Capacity

Racks per hr. 25

Motor Horsepower

Wash 1

Water Consumption

Imp. gal./liters per hr. (max. use) 28.4/129

Imp. gal./liters per rack 1.35/6.1

Temperatures °F/°C

Wash (minimum) 140°/60°

Rinse (minimum) 140°/60°

Heating

Tank heat, electric (kW) .75

Time Cycle in Seconds

Wash 90

Rinse 26

Drain/fill 25

Total 141

* Excludes 30 second NSF load/unload time

Warning: Plumbing and electrical connections should be made by qualified personnel who will observe all the applicable plumbing, sanitary and safety codes.

	Uncrated	Crated
Height*	37-1/4"	39-1/2"
Width	24"	25"
Depth	25"	25-1/2"
Ship Wt. lbs	178	198
* Front leveling feet provided.		

Due to an ongoing value analysis program at Moyer Diebel, specifications in this catalog are subject to change without notice.

Notice: Moyer Diebel does not endorse using on-demand (tankless) water heating systems, as well as PEX and other plumbing materials that may limit water flow, as these could impair machine performance. For optimal results, we recommend using appropriately sized conventional hot water tanks and standard copper water supply lines that adhere to our specifications. Not following these recommendations may void the manufacturer's warranty.